


Installation

Before installation, make sure the location where the controller unit is mounted. Please operate it according to the following steps:

1. Open the controller by loosening and removing the back case screw at the bottom with the spline tool.
2. Use the provided drilling template to accurately locate and drill the required holes. There are four drilling holes.
3. Use the screws provided to mount the back case on the wall. Be sure to draw the wiring through the large centre hole in back case, and keep level.
4. Connected accurately the system wiring following the label enclosed on the rear.
5. Put the unit back and screw it on by using the spline tool.

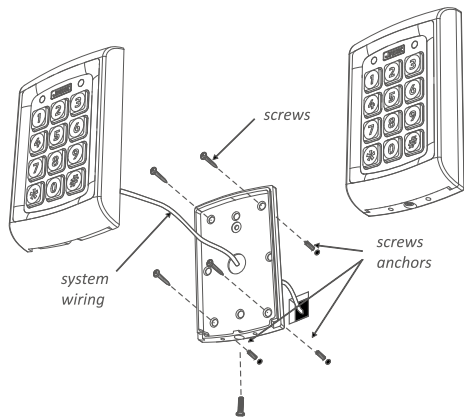

⚠ Notice

Attention items of disassembly
(C1-K0101)

1. Please remove the cover carefully following the manual. Not permitted to remove with sudden force.
2. Before remove the cover, push up the front cover a few millimeters, then follow Picture 3, lift the lower cover for less than 20° and remove the front cover gently.

